
CYLINDRICAL CANS WITH FLAT OR DOME TOP

Flat and/or dome top available, according to the format
Tactile warning emboss available in all format sizes
DIN and/or REL piercings available, depending or format
Several piercing sizes available: 24 / 32 / 42 / 57
Standard use: solvents, thinners, varnishes, paint removers, lubricants, household products, chemicals ...

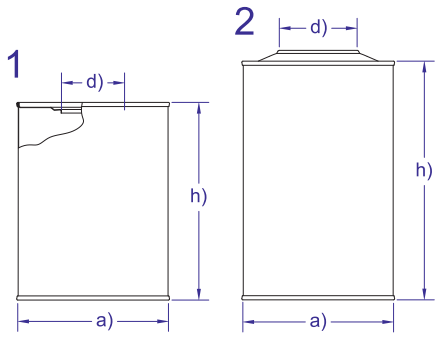

Format	Filling vol. (l)	Brimful capac. (l)	Diam. bottom a) (mm)	Height h) (mm)	Flat top (1)	Piercings d)	Dome top (2)	Piercings d)	Tactile	Approval	Remarks
D 65 x 60	0,125	0,165	65	60	Y	DIN 24 / 32 / 42	Y	DIN 24 / REL 32	O		
D 65 x 70	0,150	0,210	65	70	Y	DIN 24 / 32 / 42	Y	DIN 24 / REL 32	O		
D 65 x 92	0,250	0,280	65	92	Y	DIN 24 / 32 / 42	Y	DIN 24 / REL 32	O		
D 65 x 100	0,250	0,310	65	100	Y	DIN 24 / 32 / 42	Y	DIN 24 / REL 32	O		
D 65 x 165	0,485	0,520	65	165	Y	DIN 24 / 32 / 42	Y	DIN 24 / REL 32	O		
D 65 x 171	0,500	0,540	65	171	Y	DIN 24 / 32 / 42	Y	DIN 24 / REL 32	O		
D 73 x 80	0,250	0,300	73	80	Y	DIN 24 / 32 / 42			O		
D 73 x 110	0,350	0,420	73	110	Y	DIN 24 / 32 / 42			O		
D 73 x 138	0,500	0,530	73	138	Y	DIN 24 / 32 / 42			O		
D 73 x 210	0,750	0,830	73	210	Y	DIN 24 / 32 / 42			O		
D 73 x 80	0,250	0,290	73	80	Y	DIN 42			O	UN	
D 73 x 150	0,500	0,560	73	150	Y	DIN 42			O	UN	
D 83 x 77	0,250	0,380	83	77	Y	DIN 24 / 32 / 42	Y	DIN 24 / 42 / REL 32	O		
D 83 x 85	0,350	0,410	83	85	Y	DIN 24 / 32 / 42	Y	DIN 24 / 42 / REL 32	O		
D 83 x 118	0,500	0,600	83	118	Y	DIN 24 / 32 / 42	Y	DIN 24 / 42 / REL 32	O		
D 83 x 209	1,000	1,080	83	209	Y	DIN 24 / 32 / 42	Y	DIN 24 / 42 / REL 32	O		
D 83 x 217	1,050	1,120	83	217	Y	DIN 24 / 32 / 42	Y	DIN 24 / 42 / REL 32	O		
D 83 x 220	1,050	1,140	83	220	Y	DIN 24 / 32 / 42	Y	DIN 24 / 42 / REL 32	O		
D 83 x 187	0,750	0,920	83	187			Y	DIN 42	O		Cartridge
D 99 x 55	0,250	0,350	99	55	Y	DIN 24 / 32 / 42 / 57	Y	DIN 24 / 42	O		
D 99 x 92	0,500	0,620	99	92	Y	DIN 24 / 32 / 42 / 57	Y	DIN 24 / 42	O		
D 99 x 149	1,000	1,100	99	149	Y	DIN 24 / 32 / 42 / 57	Y	DIN 24 / 42	O		
D 99 x 165	1,100	1,200	99	165	Y	DIN 24 / 32 / 42 / 57	Y	DIN 24 / 42	O		
D 99 x 217	1,500	1,600	99	217	Y	DIN 24 / 32 / 42 / 57	Y	DIN 24 / 42	O		
D 99 x 270	2,000	2,050	99	270	Y	DIN 24 / 32 / 42 / 57	Y	DIN 24 / 42	O		
D 99 x 59	0,250	0,385	99	59,5	Y	DIN 42 / 57	Y	DIN 42	O	UN	
D 99 x 75	0,375	0,493	99	75	Y	DIN 42 / 57	Y	DIN 42	O	UN	
D 99 x 91	0,500	0,665	99	91	Y	DIN 42 / 57	Y	DIN 42	O	UN	
D 99 x 98	0,500	0,705	99	98	Y	DIN 42 / 57	Y	DIN 42	O	UN	
D 99 x 105	0,500	0,800	99	105	Y	DIN 42 / 57	Y	DIN 42	O	UN	
D 99 x 118	0,750	0,890	99	118	Y	DIN 42 / 57	Y	DIN 42	O	UN	
D 99 x 148	1,000	1,117	99	148	Y	DIN 42 / 57	Y	DIN 42	O	UN	
D 99 x 155	1,000	1,170	99	155	Y	DIN 42 / 57	Y	DIN 42	O	UN	
D 108 x 131	1,000	1,100	108	131	Y	DIN 42 / 57	Y	DIN 42 / 57	O	UN	
D 108 x 143	1,000	1,177	108	143	Y	DIN 42 / 57	Y	DIN 42 / 57	O	UN	
D 108 x 155	1,000	1,300	108	155	Y	DIN 42 / 57	Y	DIN 42 / 57	O	UN	

O - Optional

CYLINDRICAL CANS WITH FLAT OR DOME TOP

Format	Filling vol. (l)	Brimful capac. (l)	Diam. bottom a) (mm)	Height h) (mm)	Flat top (1)	Piercings d)	Dome top (2)	Piercings d)	Tactile	Approval	Remarks
D 109 x 80	0,500	0,650	109	80	Y	DIN 32 / 42 / 57	Y	DIN 42	O		
D 109 x 110	0,750	0,930	109	110	Y	DIN 32 / 42 / 57	Y	DIN 42	O		
D 109 x 132	1,000	1,130	109	132	Y	DIN 32 / 42 / 57	Y	DIN 42	O		
D 109 x 217	1,900	1,950	109	217	Y	DIN 32 / 42 / 57	Y	DIN 42	O		
D 109 x 230	2,000	2,050	109	230	Y	DIN 32 / 42 / 57	Y	DIN 42	O		
D 170 x 165	3,000	3,360	170	168	Y	57 DIN			O	UN	
D 170 x 203	4,000	4,230	170	203	Y	57 DIN			O	UN	
D 170 x 245	5,000	5,170	170	245	Y	57 DIN			O	UN	

O - Optional